Serreen

常州格林液压设备制造有限公司

CHANGZHOU GREEN HYDRAULIC CO.,LTD

电话（Tel）：0519-85954535　　电话（Mob）：（86）13685276555

传真（Fax）：0519-85954535　　Wechat：（86）13685276555

网址（Url）：www.gelinyy.com　　Cel/Whatsapp：（86）13685276555

邮箱（E-mail）：info@gelinyy.com

地址（Add）：中国江苏省常州市钟楼区新闸镇新旭路京东智能产业园西区15栋

Building 15, West Zone, Jingdong Intelligent Industrial Park, Xinxu Road, Xinzha Town, Zhonglou District, Changzhou City, Jiangsu Province, China

Serreen

·格林液压综合样本

Serreen



GREEN HYDRAULIC

TO CREAT GLOBAL ONE-STOP QUALITY SUPPLIER OF MACHINERY

常州格林液压设备制造有限公司

CHANGZHOU GREEN HYDRAULIC CO., LTD

COMPANY PROFILE
公司简介

让中国机械优品通往全球

LET CHINA'S HIGH-QUALITY MACHINERY PRODUCTS REACH THE WORLD



2007
创立18年
Founded 18 years ago

35名
研发团队
R&D Team

10+
研发专利
R&D Patents

关于我们

常州格林液压设备制造有限公司是一家专注于液压元件、液压系统、自卸车工程机械配件和农业机械配件的生产、研发、制造和销售的专业制造企业拥有18年以上的经验。2017年涉及外贸出口，始终遵循小工厂大贸易的思维理念，以人为本,重视人才。

公司高度重视产品质量,与上海大学战略合作伙伴,已通过IS09001质量体系认证,拥有16项专利。

自格林液压成立以来,我们始终坚持客户第一、诚信共赢的经营理念汇聚了机械领域的精英。公司的核心价值观是:客户第一、诚信共赢、天道酬勤、团结合作、分享利他;基于我公司的核心价值观，我司稳步发展，为全球机械行业增砖添瓦。

ABOUT US

Changzhou Green Hydraulic Co., Ltd. is a professional manufacturer focusing on the production, research and development, manufacturing and sales of hydraulic components, hydraulic systems, dump truck parts and agricultural machinery parts with more than 18 years of experience. In 2017, it was involved in foreign trade exports, always following the thinking concept of small factories and big trade, people-oriented, and valuing talents.

The company attaches great importance to product quality and has established a strategic partnership with Shanghai University. It has passed the IS09001 quality system certification and has 16 patents.

Since Green Hydraulic was founded, we have always adhered to the business philosophy of customer first, integrity and win-win, and have brought together elites in the field of machinery. The company's core values are: customer first, integrity and win-win, God rewards hard work, unity and cooperation, sharing and altruism; Based on our company's core values, our company has developed steadily and contributed to the global machinery industry.

公司区域规划
Company Area Planning




办公区/Office



重要仪式/Important Ceremony


休闲区/Recreation Centre


生产中心/Production Center


装配中心/Assembly Center


备货区/Stocking Center



CORPORATE CULTURE
企业文化

企业愿景 VISION

让中国机械优品通往全球

LET CHINA'S HIGH-QUALITY MACHINERY PRODUCTS REACH THE WORLD

企业使命 MISSION

打造机械领域，全球一站式优质供应商，为了实现全体员工的物质和精神双方面幸福，为了人类社会的进步而努力奋斗。

TO BUILD A GLOBAL ONE-STOP HIGH-QUALITY SUPPLIER IN THE FIELD OF MACHINERY, TO ACHIEVE THE MATERIAL AND SPIRITUAL HAPPINESS OF ALL EMPLOYEES, AND TO STRIVE FOR THE PROGRESS OF HUMAN SOCIETY.

企业价值观 VALUES

- **客户第一**

  CUSTOMER FIRST

- **诚信共赢**

  INTEGRITY AND WIN-WIN

- **天道酬勤**

  GOD REWARDS HARD WORK

- **团队合作**

  UNITY AND COOPERATION

- **分享利他**


  SHARE ALTRUISM

COMPANY ENVIRONMENT


公司环境






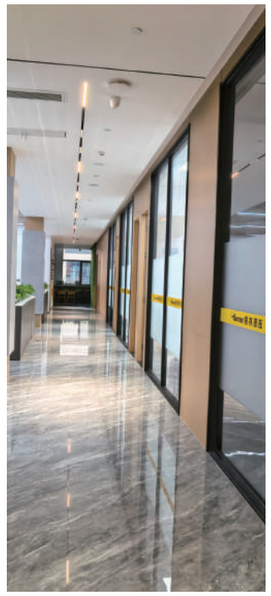



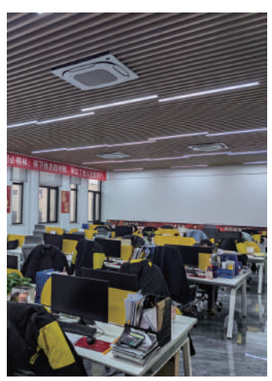



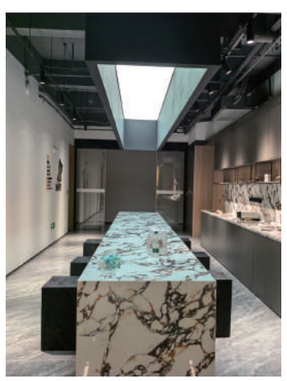


CORPORATE SHOWROOM

公司展厅






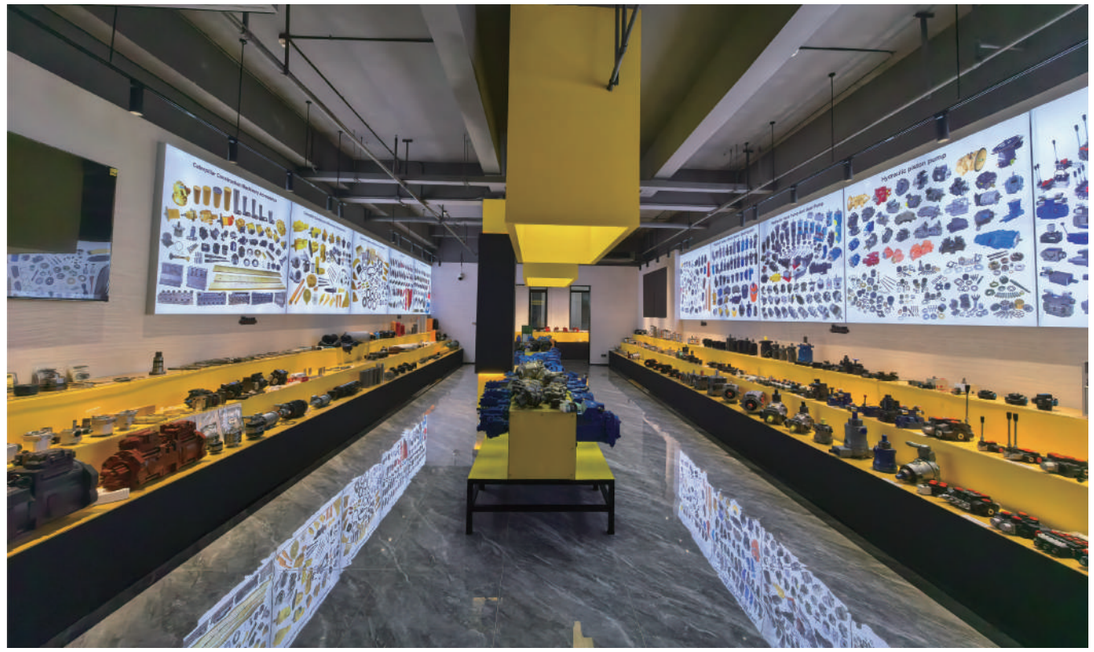








MANUFACTURING EQUIOMENT


生产设备





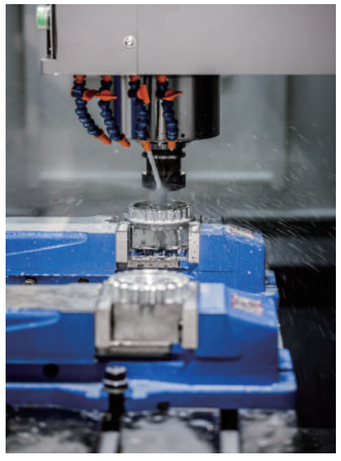



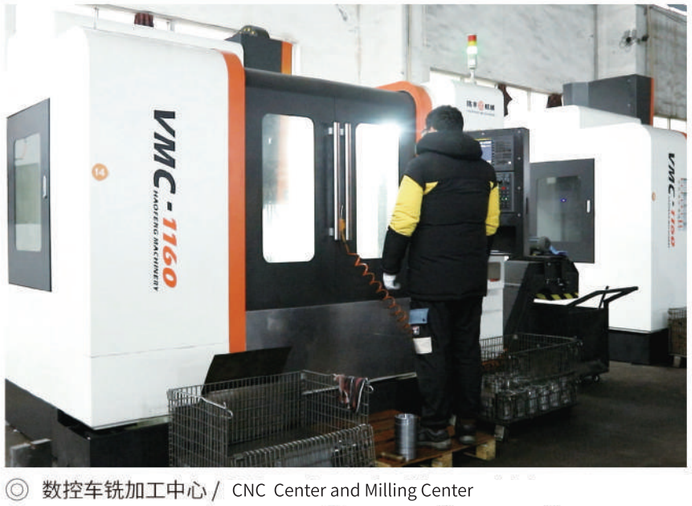


◎ 数控车铣加工中心 / CNC Center and Milling Center



INSPECTION EQUIPMENT

检验设备

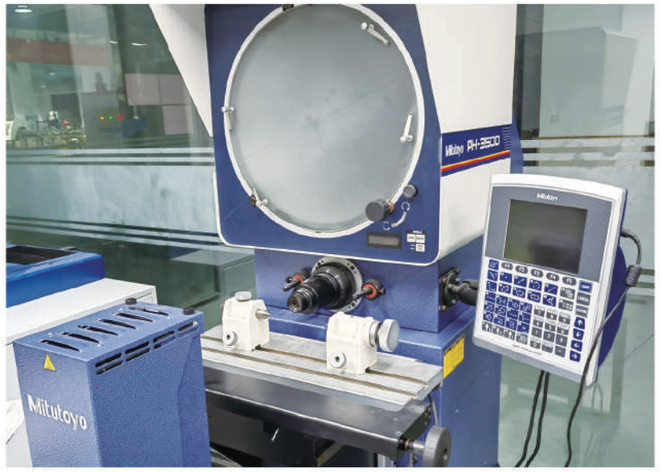


◎ 圆跳动 / Round Beat



◎ 数显洛氏硬度计
Digital Rockwell Hardness Tester



◎ 外圆检测仪 / Outer Circle Detector

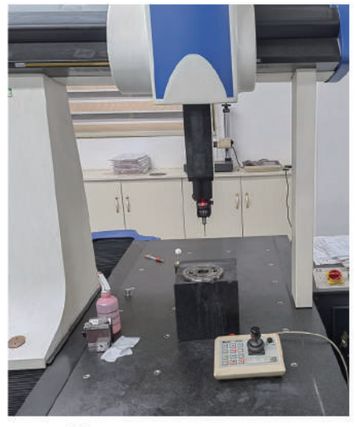

◎ 三坐标仪 / CMM



◎ 粗糙度仪器 / Roughness Instrument



COMPANY EXHIBITION
公司展会

COMPANY EXHIBITION
公司展会













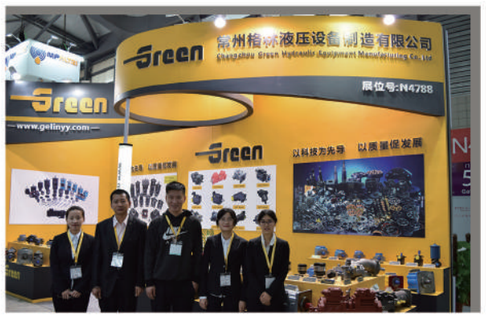


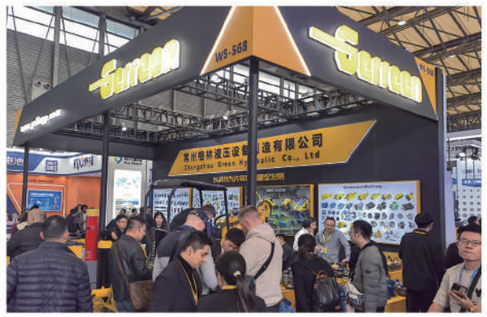
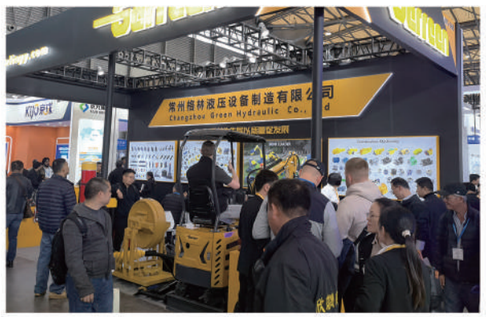








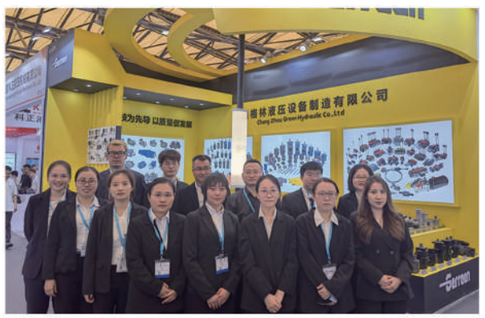





HONORARY QUALIFICATIONS

荣誉资质






















AUTHORITATIVE CERTIFICATION

权威认证

























PUMP PARTS/泵配件



PRODUCT LIST/产品目录

Brand	Tybe
Rexroth	A2F(0)10/12/16/23/28/32/45/56/63/80/90/107/125/160/180/200/250/500/1000
	A4VG28/40/45/50/56/71/90/125/140/180/250 A4VSO40/45/71/125/180/250/355/500
	A6V55/80/107/160/200/225/250 A6VM160/200/500/A6VE160
	A7V16/28/55/80/107/160/200/225/250/355/500 A8V(0)55/80/107/140/160/200
	A10VSO28/45/52/63/71/85/100/140 A10VD(VG)17/18/25/36
	A11V40/60/75/95/200/250/260 AP2D12/16/21/18/25/36
Caterpillar	CAT12G/14G/16G/120/215/245/312C/325C/330B/330C/385H
	AP-12/14 SPK10/10 SBS80/140
Komastu	HPV35/55/90/95/132/135/160/200-8
	PC30UU/40-8/50/60/120/200-3/200-5/200-6/300-7/320/400-6/650/1250 etc
Liebherr	LPVD45/65/75/90/100/125/140/250/260
Linde	HPV55T/080/HPR75/100/105/130/135/160/HMR135 B2PV35/50/75/105/140
	BPV35/50/70/100 BPR140/186/260 BMF50/75/105 BMV75.27
Eaton-vickers	PVB5/6/10/15/20/29/90/110 PVQ10~45 PVH45/57/74/81/98/106/131/141
	PVE19/21/TA19 ADU041/049/062
Parker	VOLV0/F11-005/010/020/28/39/58/150/250 F12-060/080/090/110-MF-1
	PVXS130/180/250/PVX0250/PV180/250/PVL250Parker2145/270/23/P2075/P2105/P2060
	PAVC38/65/100 PVT38/PVT64 SH5V/131
Kawaski	K3V63/112/140/180/280 S/DT/DTP/DTH K5V80/140/160/200 S/DT/DP/DTH/DPH/SH
	K3VG(VL)45~280(DT) K4V45/112 K3SP36C NV45/64/111/137/172/270
	KVC925/930/932 NX15/NVK45 MAG150/170 MX50/150/170/173
	M2X55/63/96/120/146/150/170/210 M5X130/160/180 LZV30/120/LVW060
Danfoss	PV18/20/21/22/23/24/25/26/27/29 PV90-030/050/075/100/130/180/250
	MF16A/035/500 MPV046/M46/MPR63/MPV45 SPV14/15/18 MMF025C
	BRL100 MPT044/M44 HRRO57
Nachi	PVB-2B-32L/34L/36L/38/40/42/63/505 PVD45 YC35-6/PCL-200-18B
	PZ-2B-35/2B-45/3B-70/4B-100/5B-130/6B-180/6B-220
	PZS-3B-70/4B-100/5B-130/6B-180/6B-220 PVS-0B-B/1B-16/1B-22/1B-35/1B-45
	Swing PCR-1B/2B/3B/4B/5B Travel PHV-1B/2B/3B/4B/5B
JIC	JMV-44/22 35/34 64 147/95 155
Hitachi	HPV050/080/091/102/116/118/125/145 ZX120-6/120/200-3/270/330-2
	EX60-2/120-2/200-2/200-5/300-2
Kobelco	SK200-1/3/6 250-8320430etc
Nabtescc	GM05VL/05VA/06VL/07VA/08/09/10/17/18/21/23/30H/35VA/35VL/38VB
Kayaba	PSV-10/-16/2-10/2-16 PSVD2-13E/W-17E/2-21E/2-27E PSVL-42/-54
	MSF-18/-23 MAG-12V-120E/18V-230F/33V-550F/170VP-3800G/18VP-220 etc.
	MSG-27P-10E/27P-16E/27P-23E/50P-21
Toshiba	PCV65R/80R/90R/110 RPVB92 SG02/025/04/08/12/20
Tokiwa	MKV23/MKV33
Hawe	V30D45/95/145/250 V60
Tadano	Tadano 100/150
Yuken	A16/A22/A37/A45/A56/A70/A90/A145
Harvester	HPVMF23(T23C)/HPVMF23.7/T28C/T30C/T37C
Oilgear	PVM-018/02B PVG130
Brevini	ED2090/2150/2250
Bonfiglioli	BFL309/310/311
Dinamic	RE1022/RE1023
Yuken	DG-01 BG-03/06/10 S-BSG-03/06/10 DSG-01/03 DSHG-04/06/10
	CIT/CGR-03/06/10 CPG-03/06/10 RG-03/06/10 SRG3/06/10 EFBG-03/06
	FG-01/02/03/06 ED-01 EBG-03/06/10 MBP/MSW/MPW-01/03/04/06



PISTON PUMP/柱塞泵



PISTON PUMP PARTS/柱塞泵配件



VANE PUMP/叶片泵



GEAR PUMP/齿轮泵



HYDRAULIC VALVE/液压阀



MOTOR/马达




















HYDRAULIC COMPONENTS/液压元件













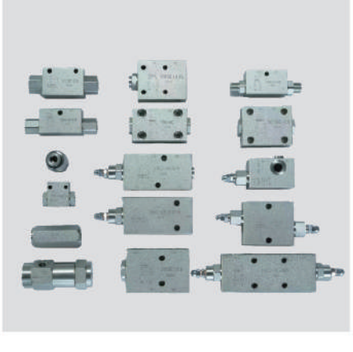




SERVO SYSTEM/伺服系统

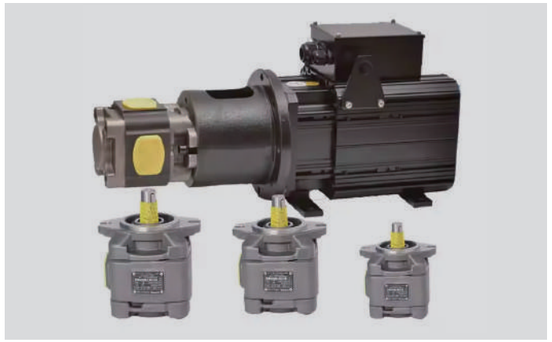




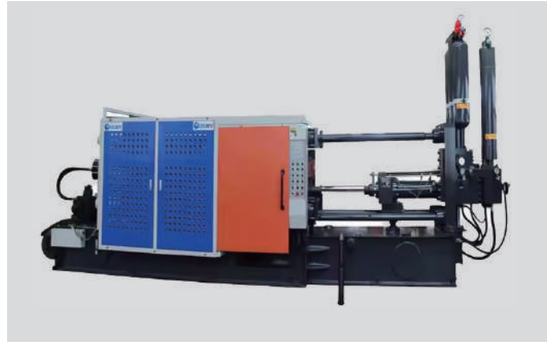

OTHER COMPONENTS/其他元件





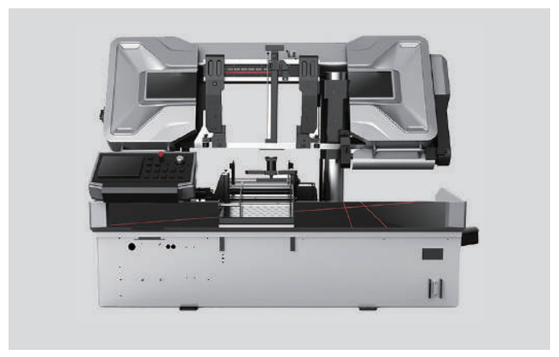




HYDRAULIC COMPONENTS/液压元件










CRIMPING MACHINE/扣管机










WINCH/绞盘



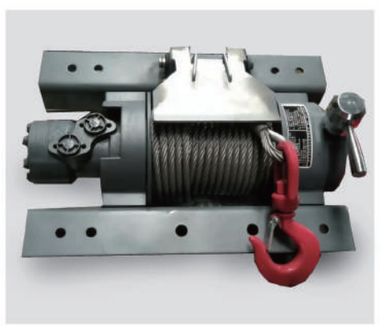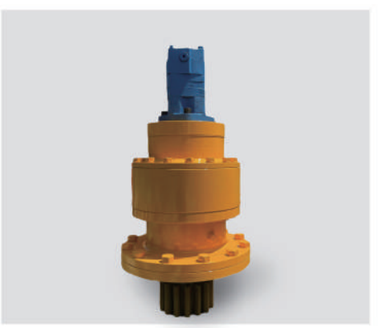

Serreen HYDRAULIC MANUFACTURE

QUALITY PRODUCT SPREAD TO THE WORLD

TO CREAT GLOBAL ONE-STOP QUALITY SUPPLIER OF MACHINERY

格林液压

Serreen

S.蓄能器

1.NXQ系列胶囊蓄能器/Capsule Accumulator Series----------735

2.GXQ系列隔膜式蓄能器/Diaphragm Accumulator Series----------737

3.NXQ系列蓄能器胶囊/Accumulator Capsule Series----------739

4.LSB系列蓄能器胶囊/Accumulator Capsule Series----------741

5.LSE系列蓄能器胶囊/Accumulator Capsule Series----------743





NXQ系列胶囊蓄能器

NXQ series capsule accumulator





NXQ — ※ — ※ / ※ — ※ — ※

名称代号:国家标准蓄能器
Product Name:Nationalstandard accumulator

结构型式:A型-小口AB型-大口
Structure Type:Type A,Type AB


公称容积/Nominalvolume:0.4~250L

公称压力/Nominalpressure:10、20、31.5Mpa、custommade


连接方式:L-螺纹连接、F-法兰连接
Connection type:L-Thread connection,F_Flange connection

工作介质:Y-液压油
R-乳化液，
EG-水乙二醇
介质温度:-20C~+93C
Medium:y_Hydraulic liquid
R-Emulsion
EG-Ethylene glycol
Tempareture:-20C~+93C


NXQA型蓄能器螺纹连接结构简图
NXQA accumulator Thread connection
NXQA-※/※-L-※

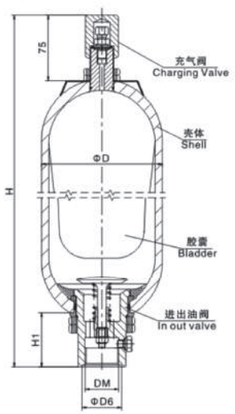

NXQAB型蓄能器螺纹连接结构简图
NXQABaccumulatorThread connection
NXQAB-※/※—※

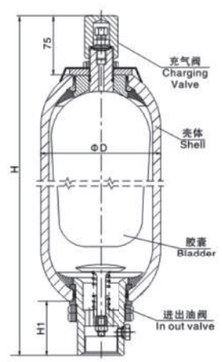

NXQ型蓄能器法兰连接结构简图
NXQ accumulator Flang connection
NXQ-※/※-L-※




结构尺寸、技术参数/Dimension technicalparameter

容量 Volume (L)	压力 Pressure (Mpa)	最大排量 Max flowrate		链接方式 Conection		基本尺寸 Dimension (mm)										重量 Weight (kg)
				L	F											
		L	F	H		DM	ΦD1	ΦD2	ΦD3	ΦD4	n-D5	ΦD6	H1	H2	ΦD	
0.4	10	1		250		M27×2						32	52		89	3
0.63				320												3.5
1				315											114	5.5
1.6		3.2	6	355	370	M42×2	40	50	97	130	6-Φ17	50	66	25	152	12.5
2.5				420	435											15
4				530	545											18.5
6.3				700	715											25.5
10		6	10	660	685	M60×2	50	70	125	160	6-Φ22	70	85	32	219	41
16				870	895											53
20				1000	1025											62
25				1170	1195											72
32				1410	1435											82
40				1690	1715											104
50	20			2040	2065											118
20		10	15	690	715	M72×2	60	80	150	200	6-Φ26	80	105	40	299	92
25				780	810											105
40				1050	1080											135
50				1240	1270											148
63				1470	1500											191
80				1810	1840											241
100				2190	2220											290
63	31.5	15	20	1188	1203	M80×3	80	95	170	230	6-Φ26	90	115	45	351	191
80				1418	1433											228
100				1688	1703											270
125				2008	2023											322
160				2478	2493											397
100		20	25	1315	1360	M100×3	80	115	220	255	8-Φ26	115	115	50	426	441
160				1915	1960											552
200				2315	2360											663
250				2915	2960											786

GXQ系列隔膜式蓄能器

GXQ series diaphragm accumulator

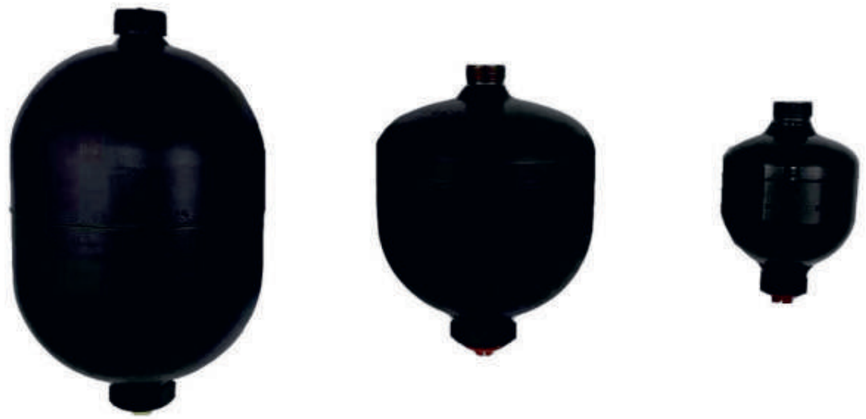

GXQ系列隔膜式蓄能器用于吸收脉动,吸收冲击补偿泄漏

GXQseries diaphragm accumulaotr is for absorbing pulsation, impact and compensation leak.

隔膜式蓄能器有一种型式:焊接式A型焊接式焊接的压力容器，气端可用
本公司生产的GCQJ充气工具充气,油端连接可有多种型式。柔性隔膜(不可更换)，
用于隔离油液和气体。设置在隔膜底部的阀座。

There are two types: the diaphragm accumulator welding type andscrew typeWelding Type A:
Welding of pressure vessels,use chaori GCQJ charging, oil has
beenConnected to avariety of types.
The flexible diaphragm (not change), is used to isolate the oil and gas.
Set the diaphragm at the bottom of the seat.

型号说明/ModelInstruction

GXQ – A – ※ / ※ – ※ – ※

名称代号:国家标准蓄能器
Product Name:Nationalstandard accumulator

结构型式:A型,B型
Structural type: Type A, Type B


公称容积/Nominalvolume:0.16-3.5L

公称压力/Nominalpressure:10~33MPa


油端接口:AM型AF型
Oil end interface: AM type AF type

工作介质:
Y-液压油,
R-乳化液
Working medium:
Y-Hydraulic oil,
R-emulsion

结构简图/The structure diagram

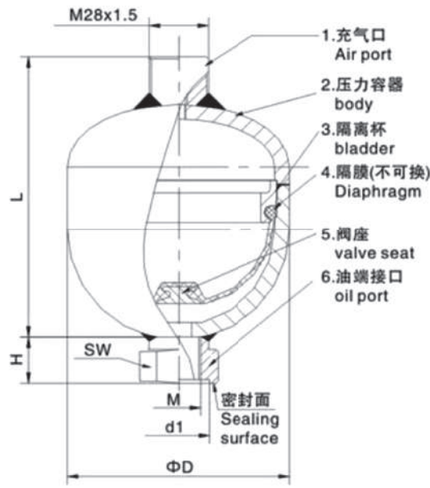

AM型隔膜式蓄能器
AM Type Diaphragm Accumulator

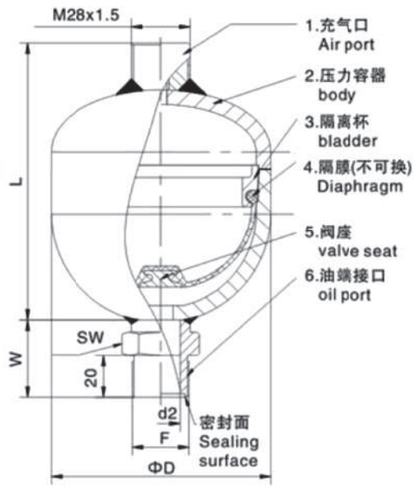

AF型隔膜式蓄能器
AF Type Diaphragm Accumulator

结构尺寸、技术参数/Dimension technicalparameter

容量 Volume (L)	压力 Pressure (Mpa)	基本尺寸 Dimension (mm)			油端接口 0il port				W (mm)	SW	重量 Weight (kg)
					AM/d1		AF/d2				
		φD1	L (mm)	H (mm)	公制 Metric	英制Inch	公制 Metric	英制Inch			
0.075	10	69	107	21	M14×1.5/ M28×2.4		M28/1.5	G1/2	36	32	1
0.16		74	105								1.2
0.25		84	110		M28×1.5/ M22×2.4						1.5
0.32		93	118	25							1.8
0.5		105	135								2.4
0.6	21	115	147				M33×1.5		42	36	3.5
0.75		121	147								3.75
1		136	163								4.7
1.4		150	181								6
2	33	170/173	198	30	M28×1.5/ M30×3.1	G3/4	M45×1.5	G3/4		41/ 46	9.5
2.8		170/173	252								12


S

NXQ系列蓄能器胶囊

NXQ series accumulator capsule



结构简图/The structure diagram

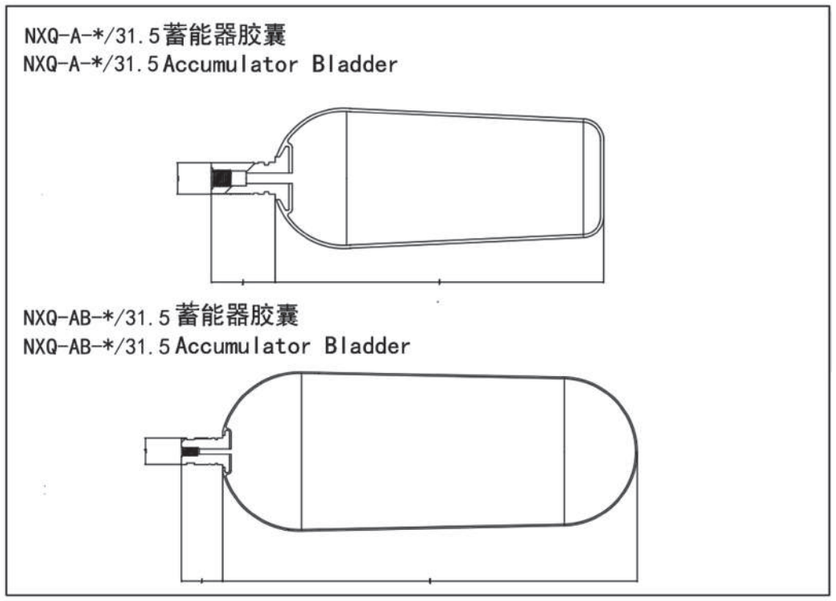

型号说明/ModelInstruction

NXQ – A – ※／※ – ※ – ※ – ※ – ※

名称代号:国家标准
Product Name :China standard

结构型式:A型-小口,AB型-大口
Structure :Type-A Type-AB

公称容积/Nominal Volume:0.4-250Liter

最大压力:315bar
MAX pressure:315bar

氮气接口材质类型:C-碳钢镀黑,G-碳钢镀锌,S-不锈钢,D-双相不锈钢,Z-锌铝合金
Nitrogen Port Valve Material:C-Black coating carbon steel ,G-Galvanized carbonsteel
S-Stainless steel,D-Duplex stainless steel,Z-Zinc aluminum alloy.

介质温度1,-20°C~+90°C(丁晴橡胶)
2,-30°C~+150°C(氢化丁晴橡胶)
橡胶硬度:60+5 邵尔A
Medium Tempareture :1.-20°C~+90°C(NBR)
2.-30°C~+150°C(HNBR)
Material hardness:60±5 ShoreA

工作介质:H-液压油,E-乳化液,EG-水乙二醇,S-海水
Work Medium : H-Hydraulic liquid, E-Emulsion,
EG-Ethvene glycol,S-sea water

胶囊材质:N-丁晴橡胶,H-氢化丁晴橡胶,I-丁基橡胶C录丁橡胶F-佛橡胶
Bladder Material:N-NBR,H-HNBR,I-IIR, C-CR, F-FPM

结构尺寸、技术参数/Dimension technicalparameter

容量 Volume (L)	基本尺寸 Dimension (mm)				压力 Pressure (Mpa)
	A	A1	R	DM	
0.4	74	44	38.5	M24×1.5	0.15
0.63	144	44	38.5		0.2
1	146	44	49		0.25
1.6	144	49	66	M30×1.5	0.4
2.5	206	49	66		0.5
4	312	49	66		0.6
6.3	486	49	66		0.75
10	365	60	95	M30×1.5	1.45
16	589	60	95		2.15
25	877	60	95		3
32	1115	60	95		3.5
40	1405	60	95		4.2
50	1680	60	96		5.1
20	380	70	131	M30×1.5 M50×1.5	1.7
25	470	70	131		1.9
40	740	70	131		2.85
50	900	70	131		3.85
63	1180	70	131		4.55
80	1480	70	131		5.55
100	1880	70	131		7.5
125	2280	70	131		8.5
150	2800	70	131		5.1

容量 Volume (L)	基本尺寸 Dimension (mm)				压力 Pressure (Mpa)
	A	A1	R	DM	
63	870	70	150	M30×1.5 M50×1.5	6.5
80	1090	70	150		8.5
100	1360	70	150		10
125	1680	70	150		12
160	2050	70	150		18
180	2320	70	150		20
200	2590	70	150		23
100	900	78	195	M30×1.5 M50×1.5	8
125	1100	78	195		9
160	1500	78	195		10
200	1900	78	195		12
250	2300	78	195		15
300	2700	78	195		18


S

LSB系列蓄能器胶囊

LSB series accumulator capsule



结构简图/The structure diagram

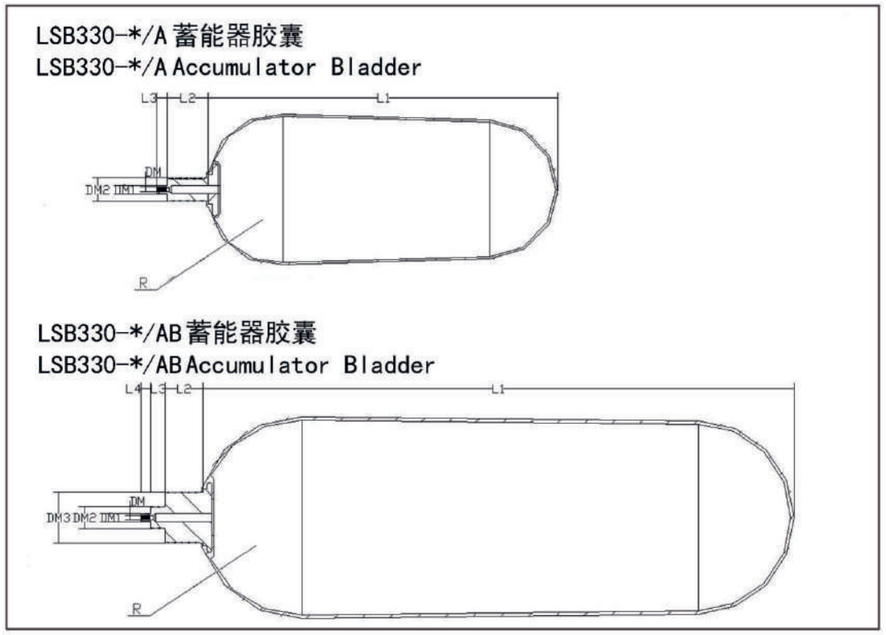

型号说明/ModelInstruction

LSB – ※ – ※／※ – ※ – ※ – ※ – ※

产品代号:欧洲标准
Product Code:European standard size

最大压力:330bar
Max Pressure :330bar

公称容积:0.5~60升
NominalVolume:0.5-60L

氮气接口结构形式:A-7/8-14UNF，AB-50X1.5 转7/8-14UNF
Nitrogen PortType :A7/814UNF,AB-50X1.5 t7/814UNF

氮气接口材质类型:C-碳钢镀黑,G-碳钢镀锌，S-不锈钢，D-双相不锈钢，Z-锌铝合金
Nitrogen Port Valve Material:C-Black coating carbon steel ,G-Galvanized carbonsteel
S-Stainless steel,D-Duplex stainless steel,Z-Zinc aluminum alloy.

介质温度1，-20℃~+90℃(丁晴橡胶)2，
-30℃~+150℃(氢化丁晴橡胶)
橡胶硬度:60+5 邵尔A
Medium Tempareture :1，-20℃~+90℃(NBR)2，
-30℃~+150℃(HNBR)
Material hardness:60±5 ShoreA

工作介质:H-液压油，E-乳化液，EG-水乙二醇，S-海水
Work Medium : H-Hydraulic liquid, E-Emulsion,
EG-Ethvene glycol,S-sea water


胶喜材质:N-丁晴橡胶，H-氢化丁晴橡胶，|-丁基橡胶,C录丁橡胶F-佛橡胶
Bladder Material:N-NBR,H-HNBR,I-IIR, C-CR, F-FPM

结构尺寸、技术参数/Dimension technicalparameter


压力 Pressure (Mpa)	容量 Volume (L)	基本尺寸 Dimension (mm)							重量 Weight (kg)
		L1	L2	L3	R	DM1	DM2	DM3	
LSB330-0.5/A-*	0.5	74	45	49	38.5	5/16-32UNF	7/8-14UNF	M50×1.5	0.25
LSB330-1/A-*	1	142			49				0.3
LSB330-2.5/A-*	2.5	320							0.35
LSB330-4/A-*	4	205			71				0.4
LSB330-6/A-*	6	310							0.6
LSB330-10/A-*	10	300	49		100				0.9
LSB330-13/A-*	13	400							1.2
LSB330-20/A-*	20	580							1.5
LSB330-24.5/A-*	24.5	734							2
LSB330-32/A-*	32	1090							2.6
LSB330-37/A-*	37	1125							2.9
LSB330-40/A-*	40	1280							3.2
LSB330-50/A-*	50	1538							3.7
LSB330-54/A-*	54	1635							4
LSB330-57/A-*	57	1725							4.25
LSB330-60/A-*	60	1840							4.5
LSB330-10/AB-*	10	300	36	13	100	5/16-32UNF	7/8-14UNF	M50×1.5	1.6
LSB330-13/AB-*	13	400							1.7
LSB330-20/AB-*	20	580							2.2
LSB330-24.5/AB-*	24.5	734							2.7
LSB330-32/AB-*	32	1090							3.3
LSB330-37/AB-*	37	1125							3.9
LSB330-40/AB-*	40	1280							3.9
LSB330-50/AB-*	50	1538							4.35
LSB330-54/AB-*	54	1635							4.55
LSB330-57/AB-*	57	1725							4.7
LSB330-60/AB-*	60	1840							5.2

LSE系列蓄能器胶囊

LSE series accumulator capsule

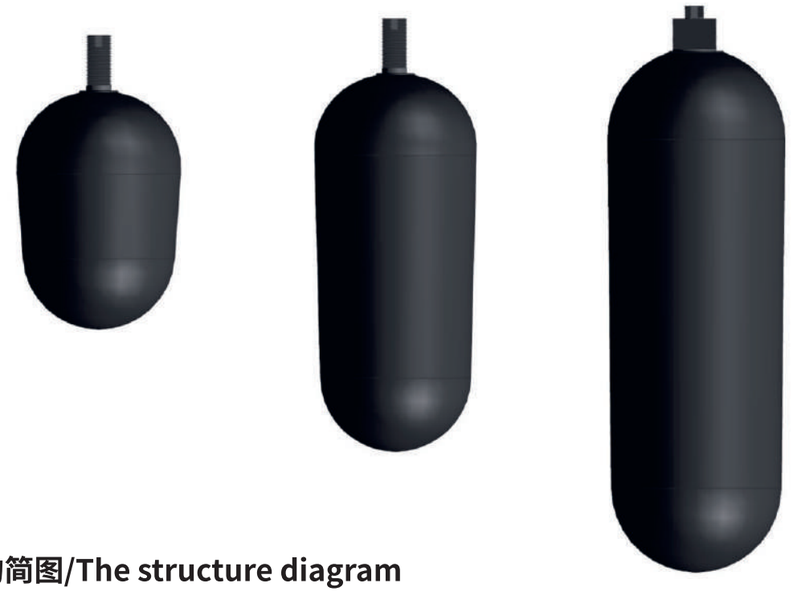

结构简图/The structure diagram

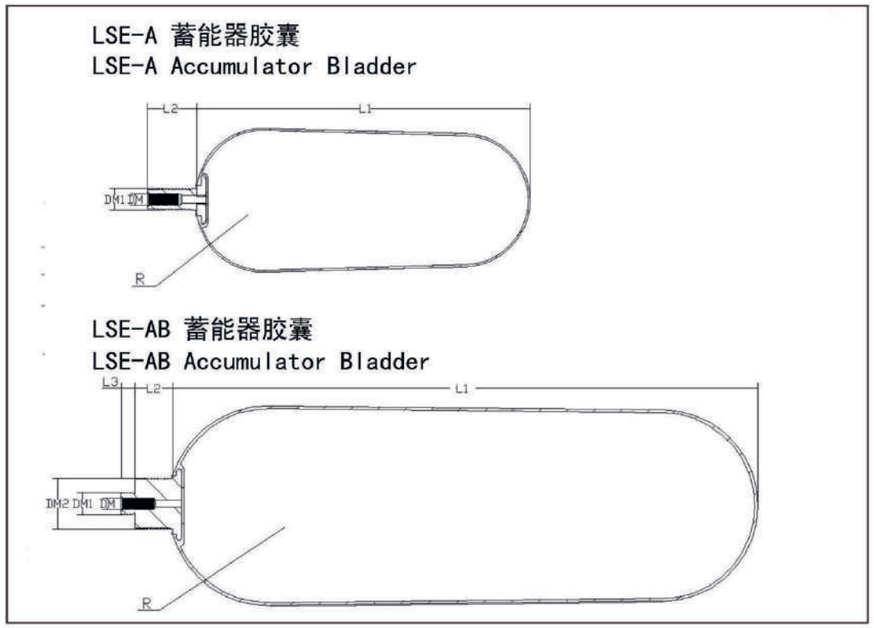

型号说明/ModelInstruction

LSE – ※ – ※／※ – ※ – ※ – ※ – ※

- 产品代号:欧洲标准 / Product Code:European standard size
- 氮气接口结构形式:A-7/8-14UNF，AB-50X1.5 转7/8-14UNF / Nitrogen PortType :A7/814UNF,AB-50X1.5 t7/814UNF
- 公称容积:0.5~60升 / NominalVolume:0.5-60L
- 最大压力:330bar / Max Pressure :330bar
- 氮气接口材质类型:C-碳钢镀黑,G-碳钢镀锌，S-不锈钢，D-双相不锈钢，Z-锌铝合金 / Nitrogen Port Valve Material:C-Black coating carbon steel ,G-Galvanized carbonsteel S-Stainless steel,D-Duplex stainless steel,Z-Zinc aluminum alloy.
- 胶喜材质:N-丁晴橡胶，H-氢化丁晴橡胶，I-丁基橡胶,C录丁橡胶F-佛橡胶 / Bladder Material:N-NBR,H-HNBR,I-IIR，C-CR，F-FPM
- 工作介质:H-液压油，E-乳化液，EG-水乙二醇，S-海水 / Work Medium : H-Hydraulic liquid, E-Emulsion, EG-Ethvene glycol,S-sea water
- 介质温度1,-20°C~+90°C(丁晴橡胶)2, -30°C~+150°C(氢化丁晴橡胶) 橡胶硬度:60+5 邵尔A / Medium Tempareture :1，-20°C~+90°C(NBR)2, -30°C~+150°C(HNBR) Material hardness:60±5 ShoreA

结构尺寸、技术参数/Dimension technicalparameter

型号 Model	容量 Volume (L)	基本尺寸 Dimension (mm)							重量 Weight (kg)
		L1	L2	L3	R	DM1	DM2	DM3	
LSE-A-0.5/330-*	0.5	74	45	49	38.5	1/2-20UNF	7/8-14UNF	M50×1.5	0.25
LSE-A-1/330-*	1	142			49				0.3
LSE-A-2.5/330-*	2.5	320							0.35
LSE-A-4/330-*	4	205			71				0.4
LSE-A-6/330-*	6	310							0.6
LSE-A-10/330-*	10	300	49		100				0.9
LSE-A-13/330-*	13	400							1.2
LSE-A-20/330-*	20	580							1.5
LSE-A-24/330-*	24	734							2
LSE-A-32/330-*	32	1090							2.6
LSE-A-37/330-*	37	1125							2.9
LSE-A-40/330-*	40	1280							3.2
LSE-A-50/330-*	50	1538							3.7
LSE-A-54/330-*	54	1635							4
LSE-A-57/330-*	57	1725							4.25
LSE-A-60/330-*	60	1840							4.5
LSE-A-10/AB-*	10	300	36	13	100	1/20-20UNF	7/8-14UNF		1.6
LSE-A-13/AB-*	13	400							1.7
LSE-A-20/AB-*	20	580							2.2
LSE-AB-24/330-*	24	734							2.7
LSE-AB-32/330-*	32	1090							3.3
LSE-AB-37/330-*	37	1125							3.9
LSE-AB-40/330-*	40	1280							3.9
LSE-AB-50/330-*	50	1538							4.35
LSE-AB-54/330-*	54	1635							4.55
LSE-AB-57/330-*	57	1725							4.7
LSE-AB-60/330-*	60	1840							5.2

S